

Concert EX3S

Architectural multi-installation addressable LED exit sign
emergency luminaire



Wall Mounted



Wire Suspended (with remote gear box)

Optics

- Power consumption;
 - 4.8W maintained
 - 2.4W non-maintained
- 20m viewing distance
- 10 long life, high output LEDs within a matrix dot coated reflector system for even illumination
- Each LED chip is alternately powered so if one fails, the legend remains lit
- Luminaire supplied with polycarbonate UP legend as standard
- Down, left and right legends also available (supplied separately)
- Legends supplied in accordance with BS 5266-1 2011 (ISO7010)

Body

- Maintained as standard but may be wired as non maintained
- IP20
- Available in wall, recessed and wire suspended mounting options (wire suspended has remote gear box)
- Slim architectural design with framed exit sign legend
- Suspension wires can be adjusted up to 1m length
- Legends can be changed without tools
- Minimum 3 hour battery duration
- 6.4V Li-Fe battery with constant current charger and LED charge indicator
- Ambient 0 – 25°C
- RAL Colour: White RAL9016.
- COMEPS addressable emergency as standard (can be wired as Easytest)
- Can be connected to a wider DALI Command Elite system across a room or building if required
- Important note: When installing the suspended version, it is necessary to recess the inverter, battery and gear into the ceiling void

Order codes

Concert EX3S (COMEPS*)

Wall mounted with UP legend	EX3SWM/EP
Recessed mounted with UP legend	EX3SRM/EP
Wire suspended with UP legend	EX3SSM/EP

Wall Legends (One Sided)


Down	EX3S7010D
Left	EX3S7010L
Right	EX3S7010R

Suspended and Recessed Legends (Double Sided)

Down	EX3S7010DD
Left/Right	EX3S7010DL

* Can be wired as Easytest if required

Dimensions

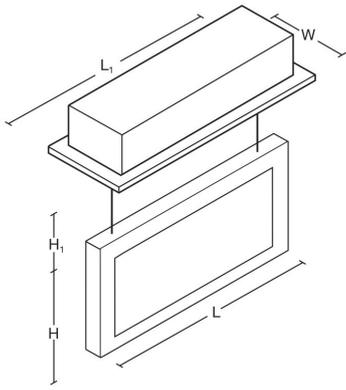

VERSION	L	L1	W	H	H1	KG
Wall Mounted	237	208	46	137	109	1
Recessed	237	275	65	140	85	1.2
Wire Suspended	237	275	65	140		1.2

To Specify

LED IP20, DALI addressable self-contained maintained or non-maintained emergency luminaire with rigid polycarbonate body and polycarbonate legends. Wall, ceiling, recessed or suspended mounting. Li-Fe battery with constant current charger and LED charge indicator - as Whitecroft Lighting CONCERT EX3S