


# Direct D3

3 circuit mains voltage track with DALI conductors for feature and display lighting

IP20



Direct D3 Accessories



Direct D3 Track, White



Direct D3 Suspension Kit



Direct D3 Emergency

## Body

- IP20
- Extruded aluminium
- White RAL 9010 or black RAL 9005 finish
- Compatible with 'Accent' LED spotlight range
- Suitable for Global Trac Pro 3 circuit adapter
- Surface mounted or suspended
- 1m or 2m lengths
- Maximum distance between suspensions 900mm for up to 25kg load. (ie. 2 per 1m track and 3 per 2m track)
- Maximum 16A rating
- Earth conductor offset to one side to ensure correct alignment of components
- Range of accessories to produce a flexible arrangement
- Dedicated tool available to ensure neat on-site cutting
- Stand-alone emergency luminaires available
- Emergency luminaires supplied with both open area and escape route lens, 190 lumens

# Order codes


## Direct D3

Version	White finish	Black finish
1m long 3 circuit & Dali track	DDX1MW	DDX1MB
2m long 3 circuit & Dali track	DDX2MW	DDX2MB
End power feed	DDLIVEW	DDLIVEB
Fixed 'L' corner, inner earth	DDLW	DDLB
Fixed 'L' corner, outer earth	DDLEW	DDLEB
Flexible corner connector	DDADJW	DDADJB
Straight in-line connector	DDJW	DDJB
End cap, unpowered	DDEW	DDEB
2m suspension kit (includes ceiling mount)	DDSUSP2MW	DDSUSP2MB
Stand-alone 3 hour emergency luminaire, COMEPS Dali test	DD3WEP	DD3BEP

## Accessories

Option	Order Code
Conductor cutting tool for on-site cutting	DDCUTTOOL

# Dimensions

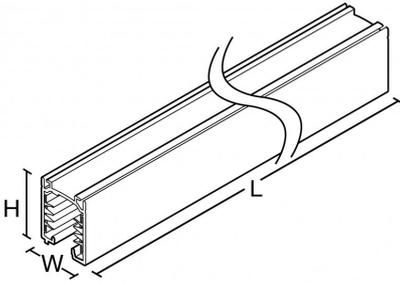

VERSION	L	L2	W	W1	H	H1	KG	KG(EM)	Ø
1m track	1000	-	31.4	-	37.8	-	1.1	-	-
2m track	2000	-	31.4	-	37.8	-	2.2	-	-
End feed	148	95	31.4	-	37.8	-	0.1	-	-
Fixed corner	142	89	31.4	-	37.8	-	0.2	-	-
Flexible corner	210	89	31.4	-	37.8	-	0.2	-	-
Em luminaire	415	-	58	-	50.4	-	-	1.2	-

## Emergency Spacings

Lamps	Open Area Lens
Illuminance	0.5 lux min
Spacing	8.8m
Maintenance	0.8
Ceiling Height	2.5m

Lamps	Escape Route Lens
Illuminance	1 lux min
Spacing	11m
Maintenance	0.8
Ceiling Height	2.5m

## To Specify

Extruded aluminium lighting track 1m or 2m length with 3 mains circuits and integrated DALI control circuit. Suitable for Accent LED spotlights with Global Pro adapters. – as Whitecroft Lighting DIRECT D3.