


SPECIFICATION

Lamp type	LED 4000lm - 4000K 3300lm - 4000K
Finish	RAL 9003(White)
Materials	Plastic Diffuser / Painted Steel
Weight	Standard Fitting = 5.5kg Emergency Fitting = 6.5kg.
Supply	220-240V AC, 50/60Hz
Operating temp	0-25C°
Connection	0.75mm ² to 2.5mm ² input terminal block
Ingress protection	IP44 from below IP20 from behind

DIMENSIONS

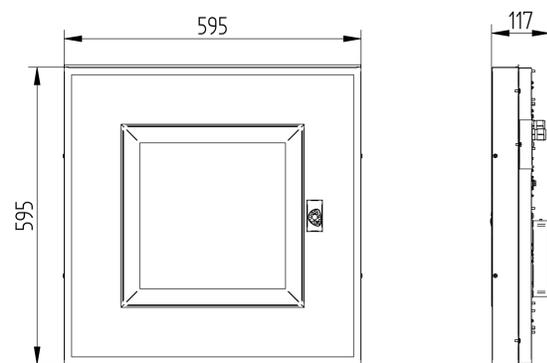

GENERAL INFORMATION

- 1) A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring.
- 2) This unit must be EARTHED.
- 3) Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
- 4) Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid
- 5) Do not carry out high voltage insulation test, i.e. 500/1000v this may damage internal components.

TECHNICAL SUPPORT


Telephone: 0161 330 6811

Email: technical@whitecroftlight.com

<http://whitecroftlighting.com/>

Whitecroft
lighting

Duo 3 Evo

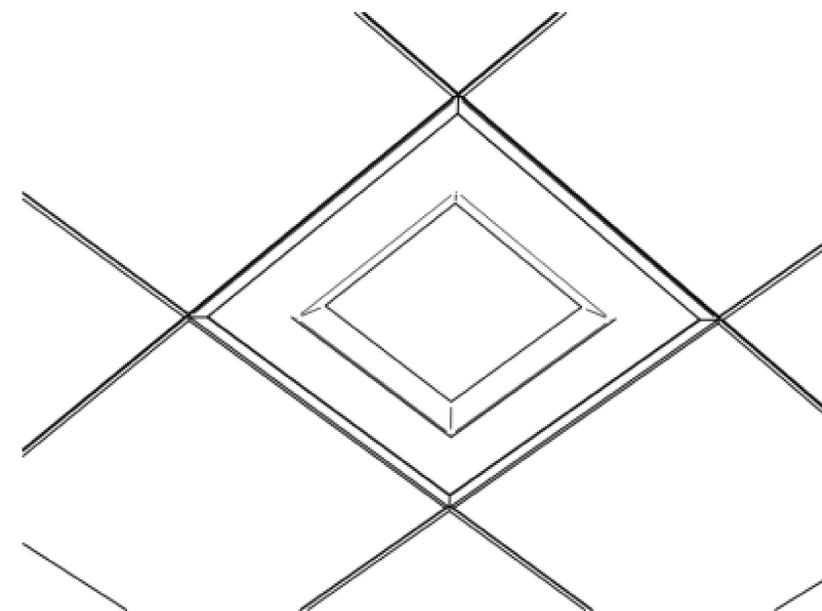

Installation Instruction

PK/DUO3EVOINSTAL

February 2018 - Rev A



Whitecroft Lighting Limited


Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX

Telephone +44 (0)161 330 6811 Facsimile: +44 (0)161 331 5855

Registered No. 3848973 England Registered Office: As above




Installation

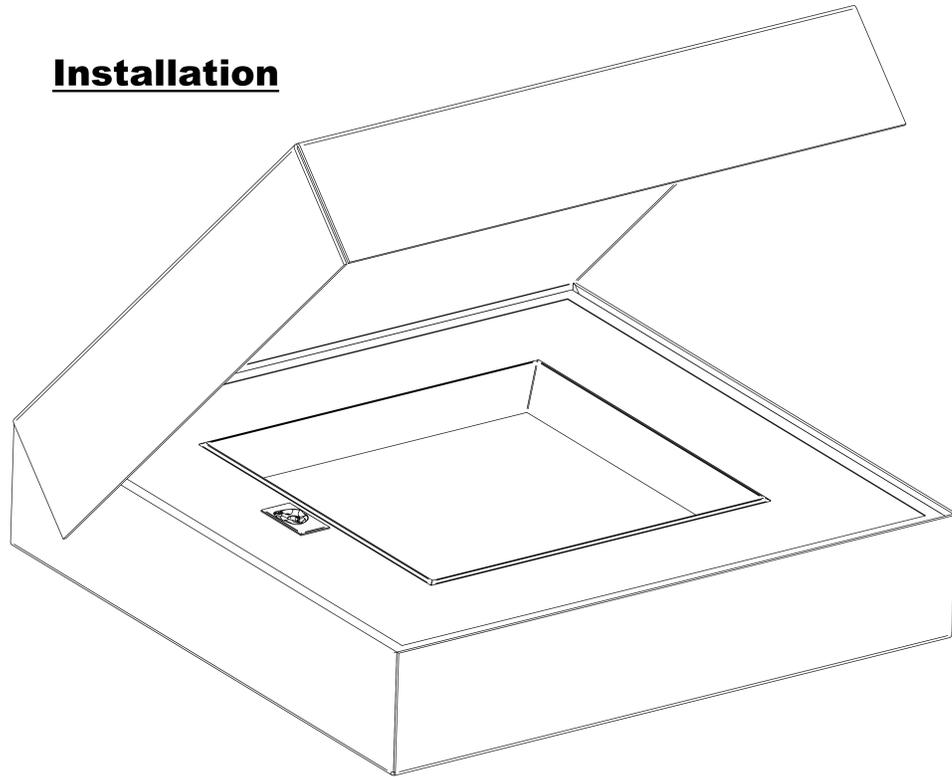


Remove the luminaire from the carton; inspect the visual faces for any scratches
The Box will include the following:
Luminaire
Installation Leaflet

Remove the terminal access cover by removing the 2 screws as shown

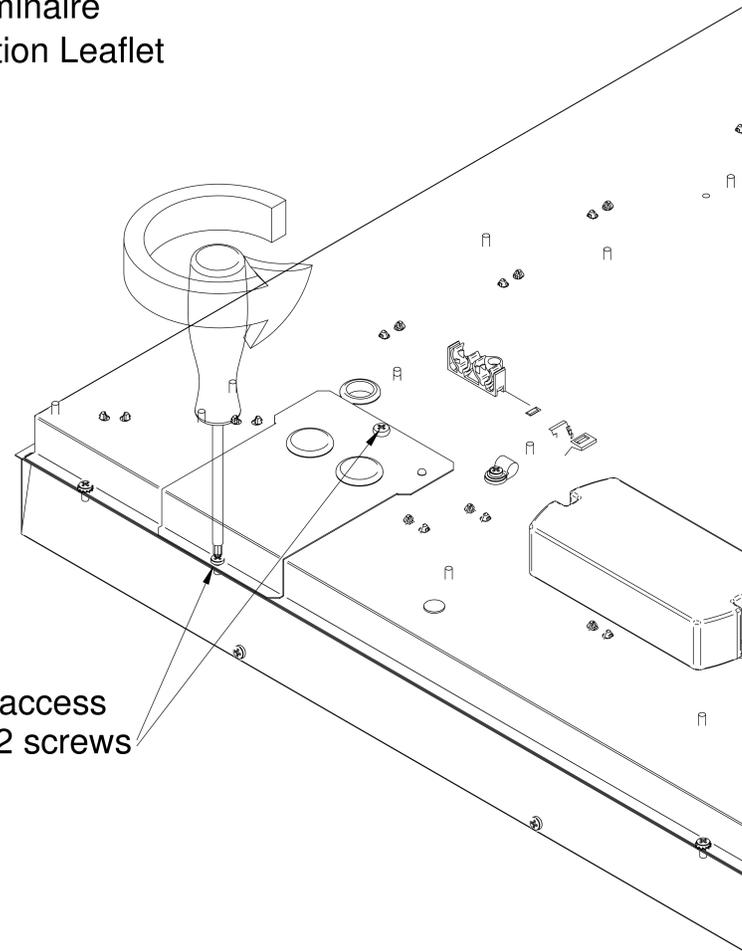

Wire mains cable through cover lid and strip/wire into terminals
use cable restraint after wiring

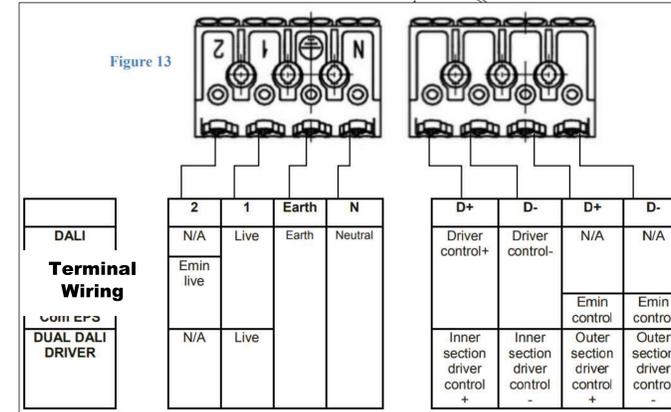

Connect batteries on emergency version

