

# Egress Exit

Versatile range of ceiling mounted surface, suspended or recessed exit signs



Egress Exit Suspended



Egress Exit Recessed

## Optics

- Power consumption in operation: 3.2W maintained, 0.8W non-maintained
- 30 metre viewing distance
- 14 long life white LEDs
- Supplied with complete set of EC and ISO format Legend Panels (right/left/down/up)
- ISO format legends supplied in accordance with BS 5266-1 2011 (ISO7010)
- Can be used as double sided for left/right direction

## Body

- IP40 rated
- Polycarbonate body finished in white
- Ceiling or wall mounted surface, suspended or recessed.
- Both surface and suspended option can be recessed using the optional recessing frame.
- Suspension wires can be easily adjusted from 15mm up to 1000mm in length
- 3 hour maintained or COMEUPS addressable DALI test
- Can be wired as non-maintained
- Supplied with long life Lithium LiFePO4 batteries:
  - Standard 6.4V 600 mAh
  - COMEUPS / DALI 3.2V 3.2Ah
- Suitable for ambient temperatures 0 to 45°C
- Also available with "EW" Routefinder Wireless for addressable emergency testing without the need for a 2 core communication cable

# Order codes

## Egress Exit


Description	3hr Emergency	COMEPS *	Routefinder Wireless
3.2W, Wall/ceiling mounted	EESM30	EESM30/EP	EESM30/EW
3.2W, Suspended	EEPM30	EEPM30/EP	EEPM30/EW

\* COMEPS version can operate as self test when not connected to a DALI system

## Accessories

Description	Order Code
Recessing frame	EEM30R

## Dimensions

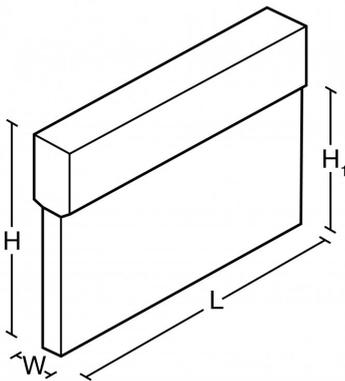

VERSION	L	W	H	H1	KG(EM)	Cut Aperture
Exit Sign	330	45	250	195	2.5	
Recessing Frame	388	80	60		0.5	372x55

## To Specify

Self-contained LED maintained emergency sign luminaire with rigid body and an easy to install full set of legends. Ceiling mounted surface, suspended or recessed with LiFePO4 battery, energy efficient charger and LED charge indicator – as Whitecroft Lighting EGRESS EXIT.