


## SPECIFICATION

Finish	RAL 9003
Materials	Mild Steel
Weight	0.6kg.
Ingress protection	IP44
Impact Rating	IK10


Step 1 - Install the Florence+ product as per its installation instruction

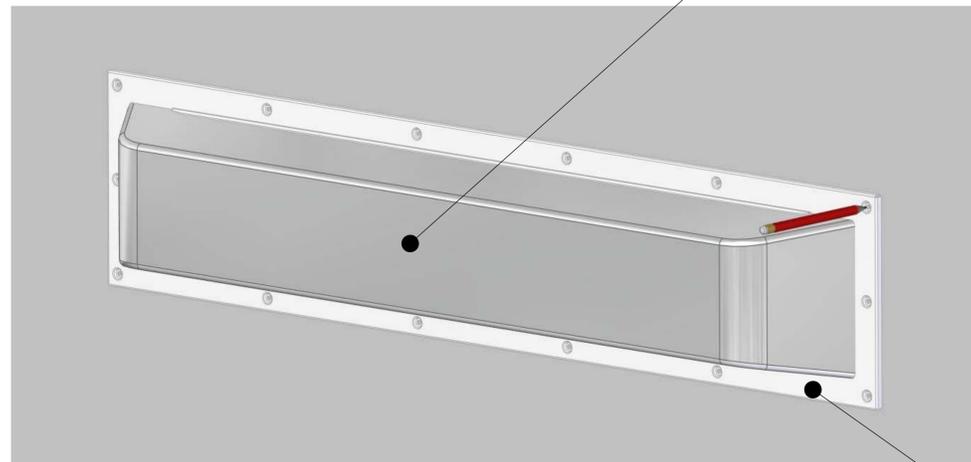

Step 2 - Unpack the Anti-Ligature Bezel then hold it around the product with the smaller upfold to the top. Hold firmly against the wall and mark out the fixing holes.

Step 3  
Remove the bezel and drill pilot holes (2.5mm).  
Take care to protect the luminaire when drilling.  
Use suitable screw plugs/anchors if installed onto brick/concrete wall (not supplied).

Note - Smaller upfold to the top.

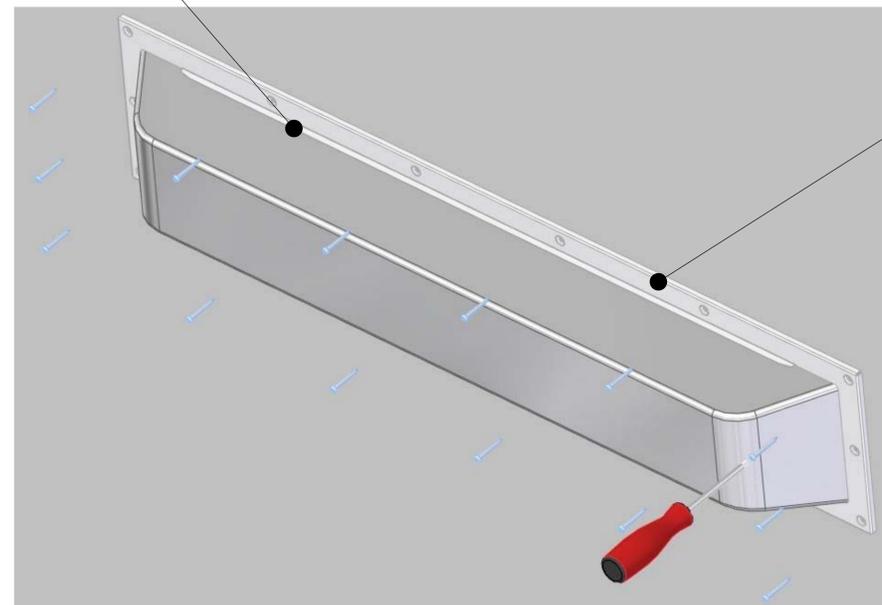

Step 4 - Place bezel around the product.  
Using the 16 anti-tamper screws supplied, screw the bezel to the wall around the Florence+ starting at opposite corners first.  
Make sure to use torque setting on the drill chuck to ensure the screws are not overtightened and stripped. Use T20 Torx Security bit required (sold separately).


Step 5  
Ensure screws are sufficiently tightened and bezel is flush to the wall all the way around to give no access to the fitting.  
If needed anti pick mastick can be used around the bezel.

### TECHNICAL SUPPORT

Telephone: 0161 331 5700  
Email: [technical@whitecroftlight.com](mailto:technical@whitecroftlight.com)  
<http://whitecroftlighting.com/>

Whitecroft  
lighting

# Florence+ Anti-Ligature Kit

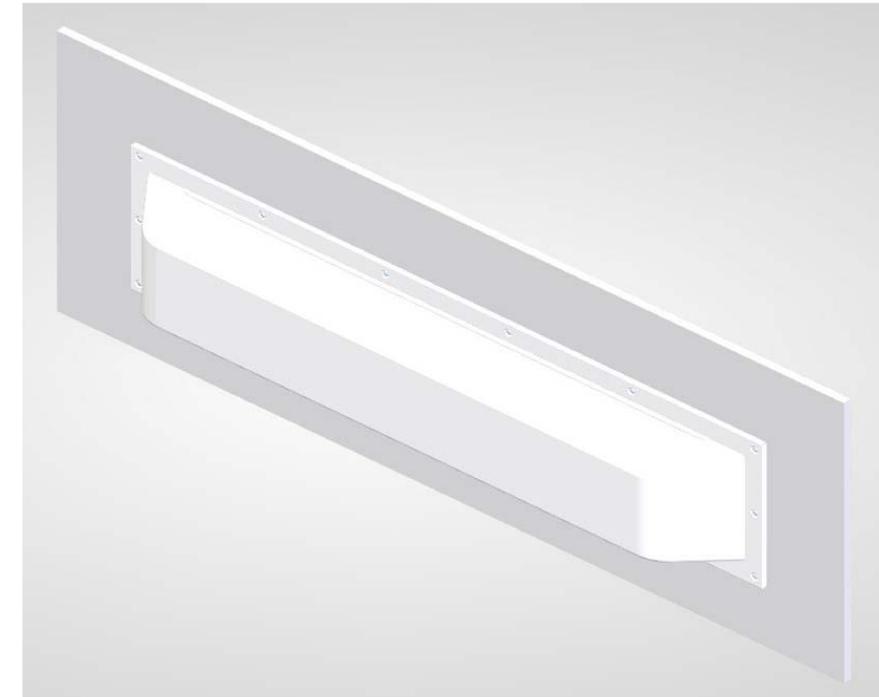

## Installation Instruction

PK/ALFLORENCE+-IL

October 2020 - Rev 1



## Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX  
Telephone +44 (0)161 330 6811 Facsimile: +44 (0)161 331 5855  
Registered No. 3848973 England Registered Office: As above