

LDR65

IP65 small diameter downlighter



Optics

- 650 lumen (9W) COB
- Available with 3000K and 4000K LED
- Multi-faceted reflector
- IP65 as standard

Body

- Cast aluminium body & heatsink
- 85mm twist lock white steel bezel with IP rated ceiling gasket
- Fire rated FR90
- Multi-faceted, high grade anodised aluminium reflector with clear glass front
- Ceiling mounting springs
- For ceiling thicknesses up to 30mm
- Supplied complete with remote mounted driver

Order codes


		B50			
4000k		LL/CW	L70	L80	L90
Fixed Output	LDR65H4KW	73	>100k	>100k	>100k
DALI	LDR65Y4KW	73	>100k	>100k	>100k

For 3000K colour temperature, please contact Whitecroft

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM

Dimensions

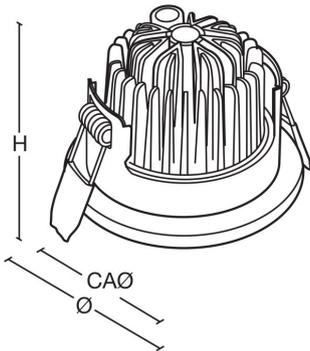

H	KG	Ø	CAØ
60	0.4	85	73

Photometric Performance



9W LED 650
lumens
LOR = 100%
SHR MAX = 1.05

To Specify

IP65 recessed LED downlight with cast aluminium body and heatsink. Multi-faceted anodised aluminium reflector with clear glass front – as Whitecroft Lighting LDR65.
