

Mirage 3 C120 Surface and Suspended



Surface or suspended mounted downlighter ideal for creating ambient and feature lighting



White body with white reflector - Surface mount



Black body with black reflector - Surface mount



Silver body with semi-specular reflector - Surface mount

Overview

From entrance atria to open plan offices, breakout areas to meeting rooms, Mirage 3 C120 Surface and Suspended is suitable for a multitude of applications. Offered in a range of outputs and three body colours, with four reflector finishes, Mirage 3 C120 has a variant to suit any lighting design, adding visual interest with a fantastic lit effect.

Mirage 3 C120 features circular design principles using recycled components to ensure minimal impact on the environment and offers a choice which can be upgraded throughout its lifecycle.

Mirage 3 C120 offers surface and suspended mounting options, with a first fix bracket for simple installation. With the option of a wire suspension kit or a decorative cord suspension kit available in three cord colours, with a ceiling rose to match the luminaire body colour, Mirage 3 C120 provides fantastic feature lighting, blending into any architectural style. Available with Organic Response® options, Mirage 3 C120 integrates into any lighting design, providing an efficient solution for your space.

Optics

- Light outputs ranging from 1000 lumens to 2000 lumens (nominal, 4000K Ra80)
- Efficacy - Up to 140 lm/W (4000K, Ra80)
- Precision injection moulded reflectors available in four finishes
 - Specular
 - Semi-specular
 - Black

- White
- Medium and wide beam distributions are ideal for general area lighting
- Available with 4000K 'cool' or 3000K 'warm' white LEDs
- Available with Ra80 and Ra90 colour rendition
- Control gear: DALI as standard

Body


- Extruded aluminium body available in three colour options, to include white (RAL 9003), silver (RAL 9006) or black (RAL 9005)
- IP20 as standard
- Graphite embedded heatsink
- Luminaire supplied complete with driver
- For suspension mounting, one suspension kit is required per luminaire. Suspension kits are to be ordered separately
- Two styles of suspension kit available
 - Wire suspension kit
 - Decorative cord suspension kit available in three cord colours, complete with ceiling rose (available in three colours to match luminaire body colour)
- Decorative suspension cord details
 - White cord with either white, silver or black ceiling rose
 - Black cord with either white, silver or black ceiling rose
 - Grey cord with either white, silver or black ceiling rose
- Optional integral Organic Response® wireless mini passive node that communicates with its neighbouring luminaires. Note, an Organic Response® sensor will be required within the lighting scheme

?Note: All DALI variants require 1 DALI address per driver.

LED Performance

Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM
3000K	>80	MacAdam 3 SDCM
4000K	>90	MacAdam 3 SDCM
4000K	>90	MacAdam 3 SDCM

Dimensions

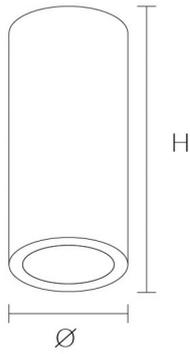

VERSION	H	Ø
C120 Surface	290	120
C120 Suspended	290	120

To Specify

Surface or suspended mounted premium downlighter available in three body colours with four reflector types. Graphite heatsink for optimum thermal management and superior optics designed for maximum visual comfort. A modern aesthetic, designed to offer visual interest in any lighting scheme - As Whitecroft Lighting MIRAGE 3 SURFACE AND SUSPENDED