


PRODUCT DIMENSIONS

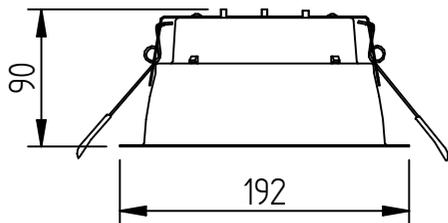

SPECIFICATION:

LAMP TYPE: LED

OUTPUT: 1100LM & 2000LM NOMINAL

COLOUR: 3000K & 4000K

MATERIALS: ALUMINIUM BODY, WHITE POLYCARBONATE DIFFUSER

CONTROL GEAR: FIXED OUTPUT & DALI

EMERGENCY: 3HR EMERGENCY & COMEPS

SUPPLY: 220 - 240V. 50-60HZ AC

AMBIENT TEMPERATURE: 0 - 25°

INPUT WIRE CROSS-SECTION: NON DIMMABLE PRODUCT MAX 1.5MM², OTHER VARIANTS MAX 2.5MM²

TERMINAL BLOCK TYPE: PUSH-WIRE (NON EM) & PIANO KEY (EM)

INGRESS PROTECTION: IP44 (FROM BELOW)


NON EMERGENCY VERSIONS ARE CLASS 2

GENERAL INFORMATION

1. A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring
2. Observe ESD precautions during installation
3. Emergency versions must be EARTHED
4. Ensure that the rated voltage and frequency requirements are compatible with the available mains supply
5. Cleaning of the reflector and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid
6. Do not carry out high voltage insulation test, i/e/ 500/1000v as this may damage internal components


TECHNICAL SUPPORT
Telephone: 0161 331 5700
E-mail: technical@whitecroflight.com
<http://www.whitecroflighting.com/>

NOTE A

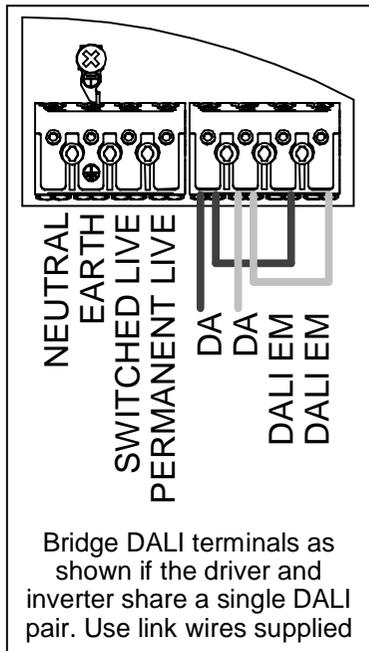

Whitecroft
lighting

XR1

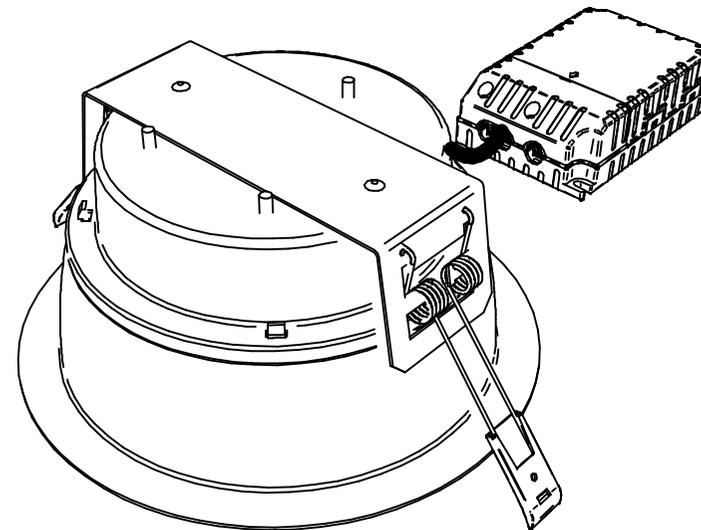

LED DOWN LIGHT Installation Instructions

PK/XR1INSTR

REV (4) - 10 / 2017



Whitecroft Lighting Limited




Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX
Telephone +44 (0)870 5 087 087
Facsimile: +44 (0)870 5 084 210

Registered No. 3848973 England
Registered Office: As above




XR1 - Installation

WHITECROFT LIGHTING LIMITED


FOLLOW THIS SIDE FOR.	3000K		4000K	
	1100LM	2000LM	1100LM	2000LM
FIXED OUTPUT	•	•	•	•
DALI	•	•	•	•
FIXED OUTPUT 3HR EM				
DALI 3HR EM				
FIXED OUTPUT COMECS				
DALI COMECS				

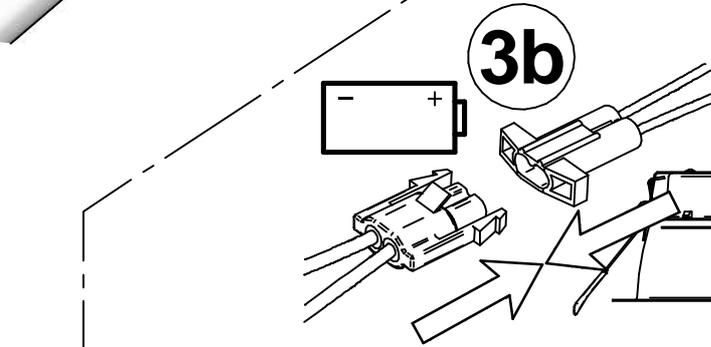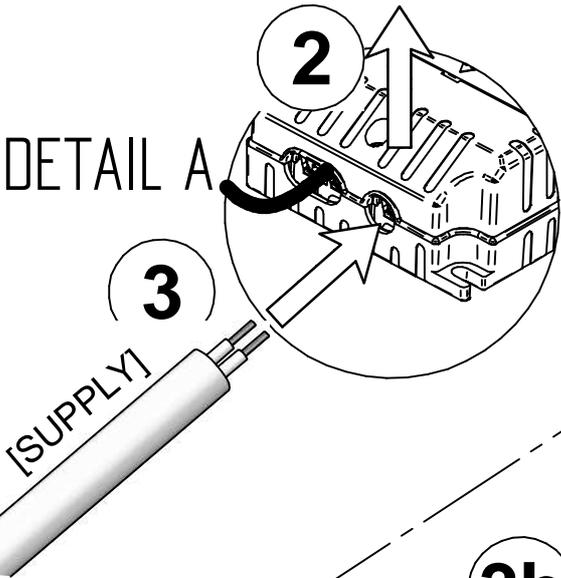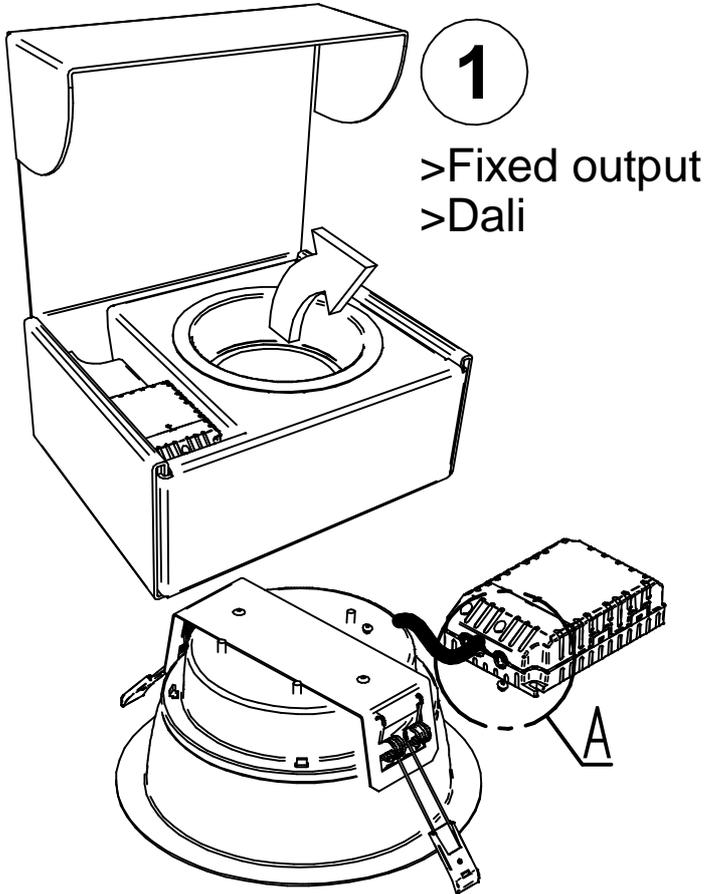

FOLLOW THIS SIDE FOR.	3000K		4000K	
	1100LM	2000LM	1100LM	2000LM
FIXED OUTPUT				
DALI				
FIXED OUTPUT 3HR EM	•	•	•	•
DALI 3HR EM	•	•	•	•
FIXED OUTPUT COMECS	•	•	•	•
DALI COMECS	•	•	•	•

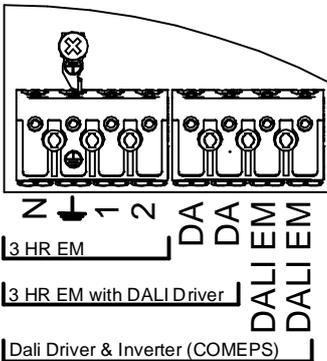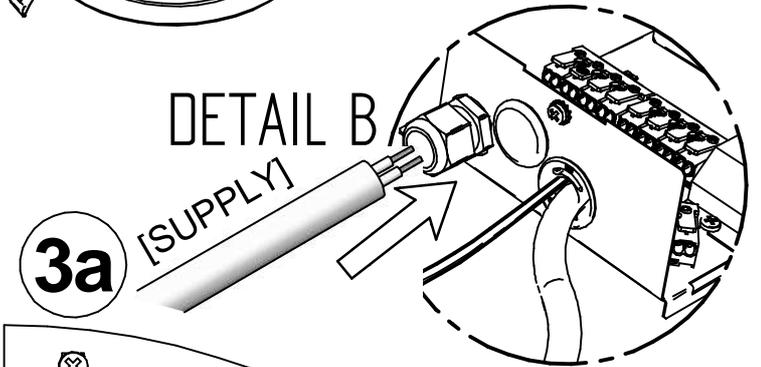
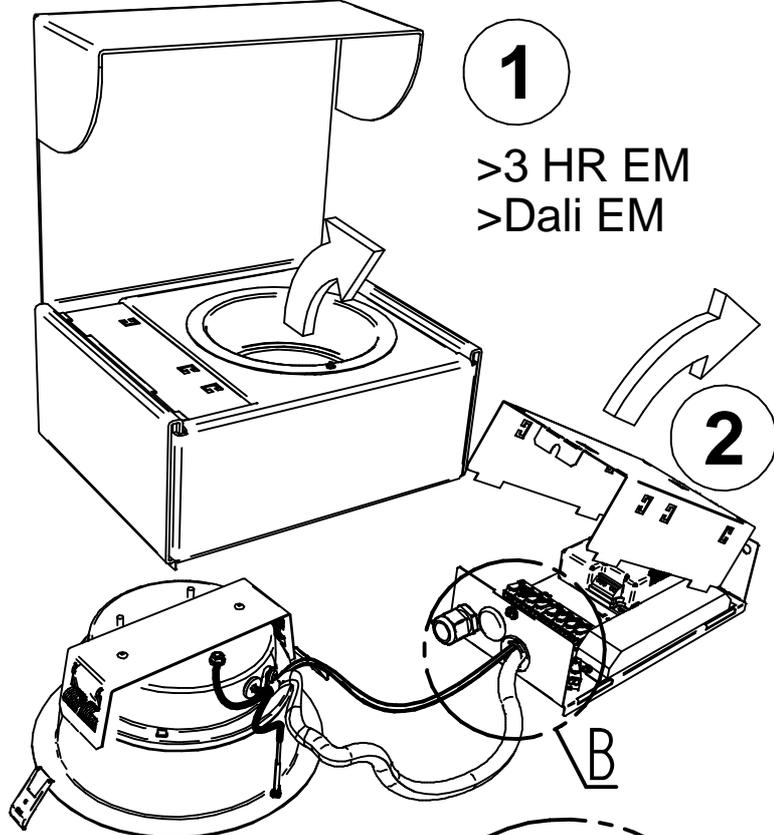


SEE NOTE 'A'

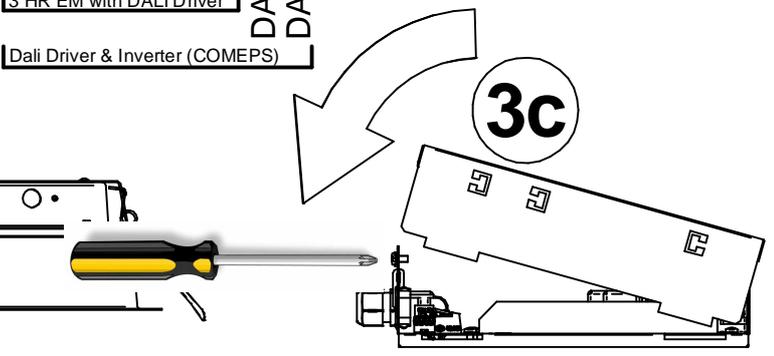

XR1 - Installation




WHITECROFT LIGHTING LIMITED

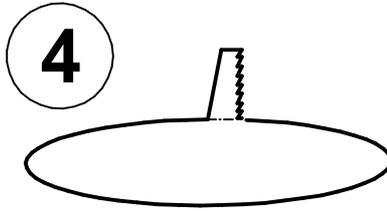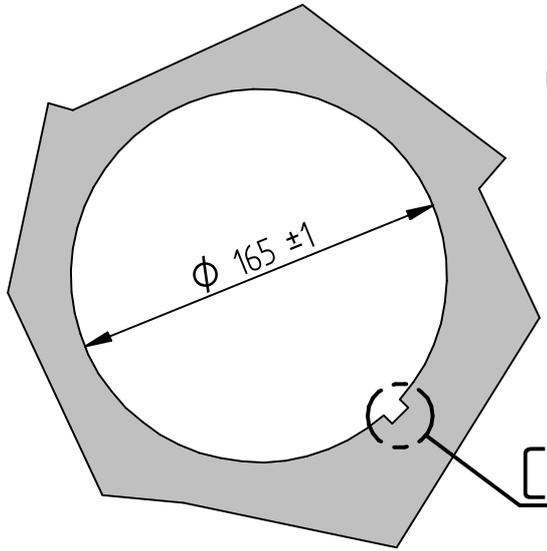

USE CARDBOARD PATTRESS FOR VERY SOFT FIBRE TILES.
PART CODE - MLA-PAT



EM LED
INDICATOR

DETAIL C

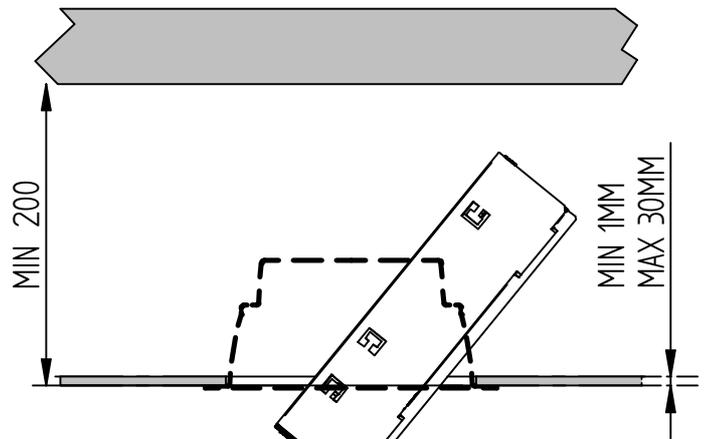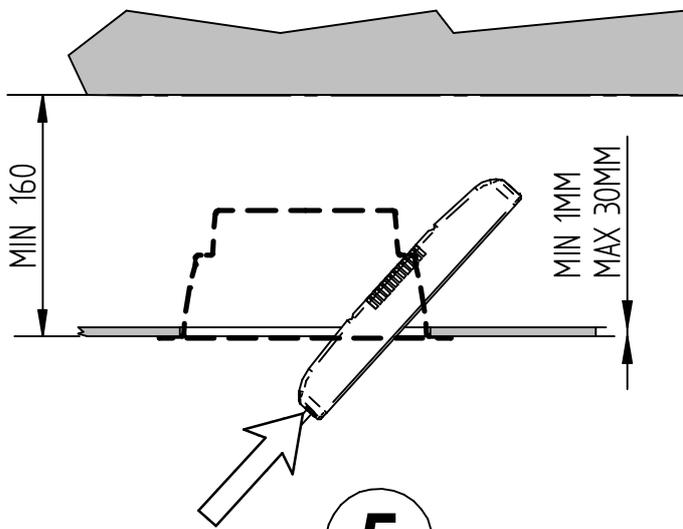

5

5

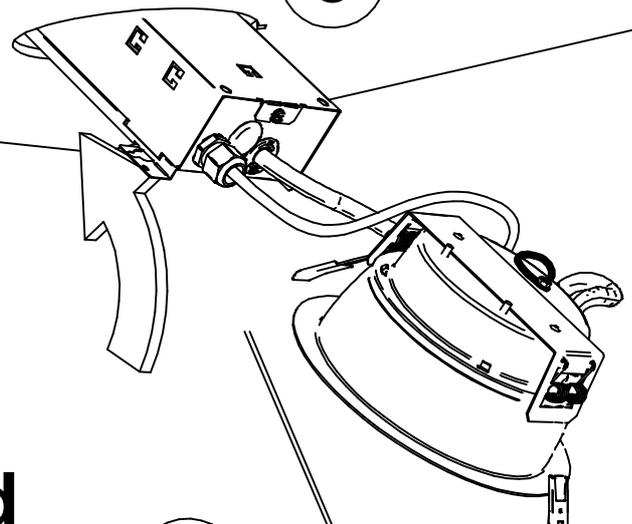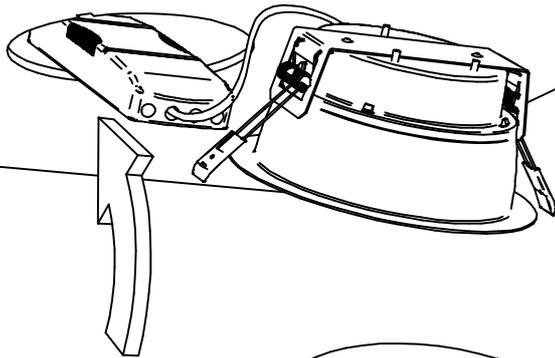

6a


2nd

6b

1st

6c

CARE MUST BE TAKEN IF
REMOVING FITTING

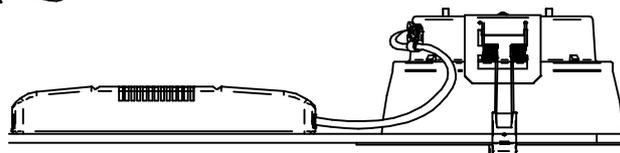

7

