

# Tegan Line

Linear 1200 x 600 recessed module



## Optics

- Light Output:
  - 7000 lumens (61W)
- Emergency Output (BLF):
  - All variants - 330 Lumens
- Opalised diffuser
- 'Cool' white 4000K colour temperature

---

## Body

- Fabricated steel finished white
- Suitable for lay-in exposed T ceiling installation
- IP44/IP20
- To suit 1200 x 600mm grid ceiling

### Major Project Solutions

This product has been designed for use in major projects and as such is subject to minimum order quantities. For more information please consult your local Sales Engineer.

---


# Order codes

				B50		
Tegan Line	Fixed Output	3hr Emergency	LL/CW	L70	L80	L90
7000 lumens, 61W	TELH14K/SRF1	TELH14KEM/SRF1	114	>100K	>100K	84K

# LED Performance


Colour Temp	RA (CRI)	Colour consistency
61W/4000K	>80	MacAdam 3 SDCM

# Dimensions

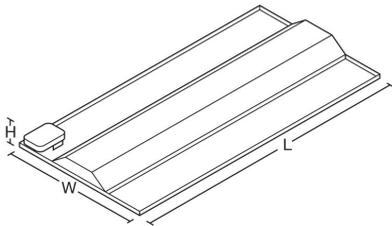


L	W	H	KG
1194	594	80	9

# Photometric Performance



61W 4000K 7000  
 Lumens  
 LOR = 100.0%  
 SHR MAX = 1.58

# Performance Guide



Lamps	61W 4000K LED
Illuminance	1000 lux
Spacing	2.4m x 2.4m
Maintenance	0.8
Reflectance	70/50/20
Ceiling Height	2.8m
Working plane	0.8m

---

## To Specify

Recessed LED 1200 x 600mm luminaire with slim line steel body and opalised diffuser. Suitable for lay in exposed T ceilings – as Whitecroft Lighting TEGAN LINE.

---