


# Tubular Columns

Cost effective stepped tubular steel lighting column

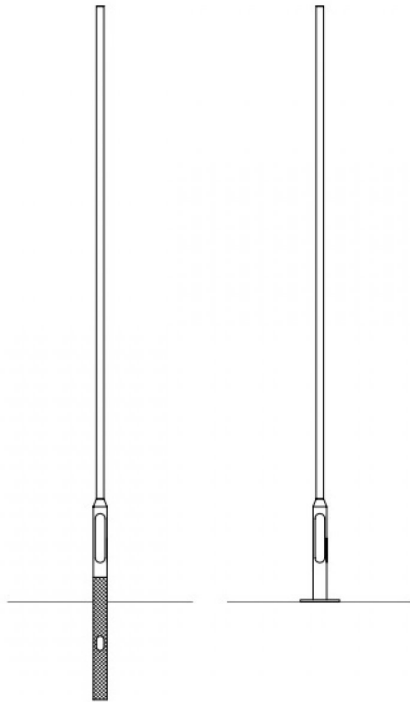

Tubular column with black finish and twin heads

## Overview

- 4 – 12m high stepped tubular steel columns
- 12 & 15m octagonal tapered steel floodlight columns
- Planted root or flange plate mounting
- Hot dipped galvanised finish to BS EN ISO 1461 for maximum protection
- Bitumen treated base as standard (columns up to 12m)
- Optional black or silver paint finish for extended life and enhanced aesthetics
- Supplied with blank base board and locking door
- Mid hinged and decorative conical columns also available
- See 'column attachments' webpage for details of adapters and brackets
- See 'technical information pack' download for column, bracket and luminaire combinations
- Compliant with BSEN 40

# Order codes

## Planted Root Columns

Planted Root Columns	
4m Light Duty	CT4PRXXL
5m Medium Duty	CT5PRXXM
5m Heavy Duty	CT5PRXXH
6m Medium Duty	CT6PRXXMD
6m Heavy Duty	CT6PRXXH
8m Medium Duty	CT8PRXXMD
8m Heavy Duty	CT8PRXXH
8m Extra Heavy Duty	CT8PRXXEH
10m Medium Duty	CT10PRXXMD
10m Heavy Duty	CT10PRXXH
10m Extra Heavy Duty	CT10PRXXEH
12m Heavy Duty	CT12PRXXH
12m Extra Heavy Duty	CT12PRXXEH
15m Heavy Duty	CT15PRXXH
For column, bracket and luminaire compatibility see download - Technical Information Pack	


## Options

FLANGE PLATE MOUNTED	Replace 'PR' with 'FM'	ie. CT4FMXXL
BLACK FINISH	Add suffix /BLK	ie. CT4PRXXL/BLK
SILVER FINISH	Add suffix /SLVR	ie. CT4PRXXL/SLVR

## Accessories

M16 flange mounting kit to suit 4 to 6m (medium duty) flange mounted columns	CFMKIT1
M24 flange mounting kit to suit 6 to 12m (heavy duty) flange mounted columns	CFMKIT2
Flange kit M16 template	CFMTEMP1
Flange kit M24 template	CFMTEMP2
For mounting brackets see - Column Attachments	

# Dimensions

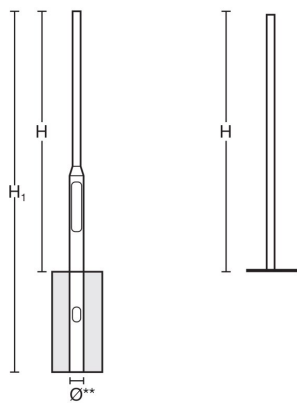

VERSION	H	H1	KG	Base Ø	Spigot Ø	Shaft Ø
4m Light	4000	4800	36.6	140	76	76
5m Medium & Heavy	5000	5800	48.0	140	76	76
6m Medium	6000	7000	49.2	140	76	76
6m Heavy	6000	7000	85.0	168	76	89
8m Medium	7750	8950	94.0	168	76	89
8m Heavy	7750	8950	110.8	168	101	114
8m Extra Heavy	7750	8950	139.7	194	127	140
10m Medium	9750	11250	134.0	168	101	114
10m Heavy	9750	11250	165.6	194	127	140
10m Extra Heavy	9750	11250	205.6	194	127	140
12m Heavy	11750	13450	184.0	194	127	140
12m Extra Heavy	12000	13700	230.0	300	N/A	N/A
15m Heavy	15000	17000	250.0	342	N/A	N/A

## To Specify

Stepped tubular or octagonal tapered steel lighting column with planted root or flange plate mounted base. With highly protective galvanised finish as standard and colour overpaint options – as Whitecroft Lighting TUBULAR COLUMN